


### GLASS LIFTER 12V - 1000KG CHANNEL

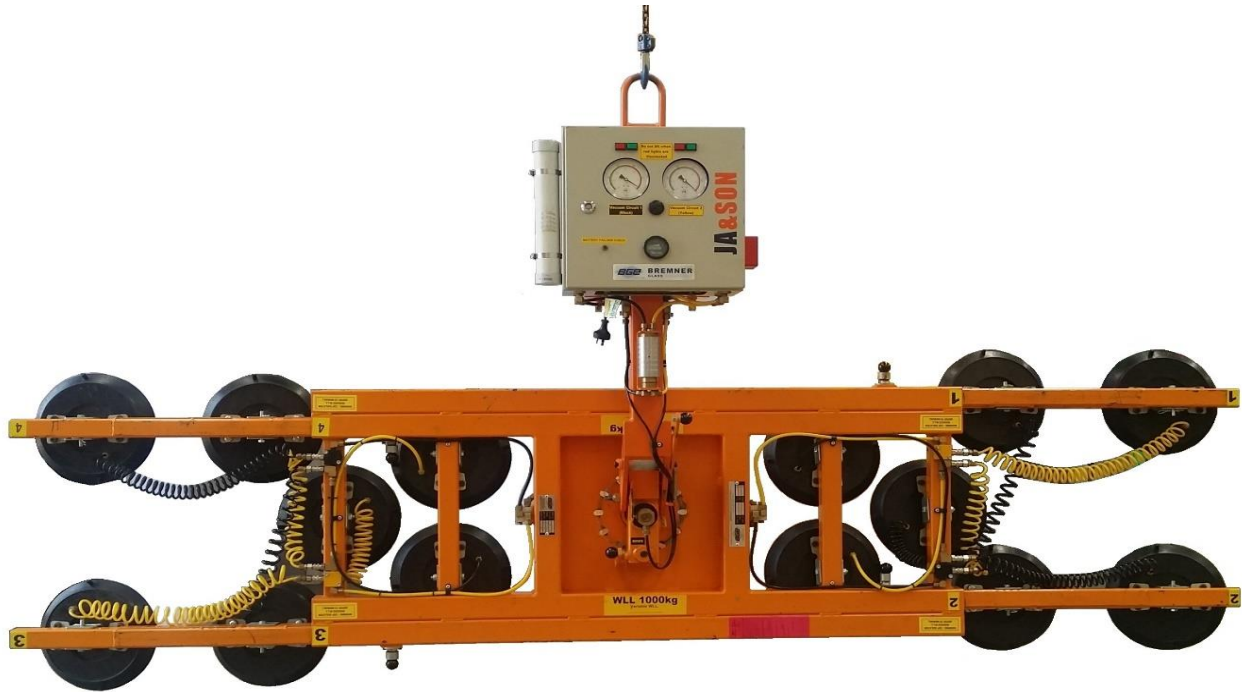

#### Standard Vacuum Pad Spread:

Minimum Width - 926 mm  
 Maximum Width - 926 mm  
 Minimum Length - 2210 mm  
 Maximum Length - 3610. mm

#### Number / Size of Vacuum Pads:

14 / 11" (28cm) dia. Lipped vacuum pads

#### Average Weight of Vacuum Lifter:

495lbs (225kg)

#### Load Capacity:

With 6 vacuum pads in use - 880lbs (400kg) Dual Vacuum  
 With 8 vacuum pads in use - 1188lbs (540kg) Dual Vacuum  
 With 10 vacuum pads in use - 1485lbs (675kg) Dual Vacuum  
 With 12 vacuum pads in use - 1760lbs (800kg) Dual Vacuum  
 With 14 vacuum pads in use - 2200lbs (1000kg) Dual Vacuum

#### Standard Operating Power:

12 volts DC, 10 amps

#### Load Movement:

Manual rotation, 360° edgewise, with automatic locking at each 1/4 revolution  
 Assisted man tilt, 90° btwn upright & flat, with automatic latching in upright position

#### Standard Features:

Vacuum Gauge	Adjustable position lift spool
Vacuum line filter	Dual vacuum system
Vacuum reserve tank	Low vacuum warning buzzer
Spring-mounted vacuum pads	Green lift light
Removable pad frame extensions	On-board battery and charger
Blow-off for quick release	Battery energy Gauge